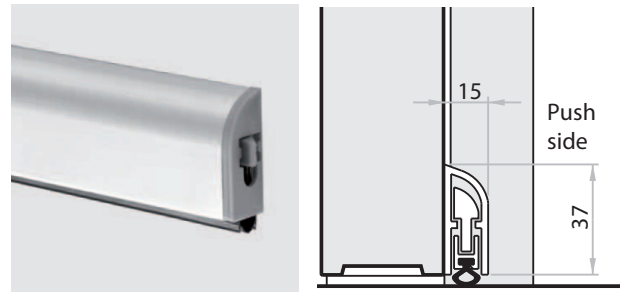


AUTOMATIC DOOR SWEEP

On request, Rever, Univer and Proget doors are available with an automatic door sweep to prevent air drafts from entering through the crack between the leaf and the floor. It complements the FF sealing applied to the frame to provide better acoustic insulation and better air sealing for the door.



It is applied on the push side by using screws to attach it directly to the sheet metal of the door, after which the mechanism is completely covered with an anodized aluminum profile. On request, it can also be provided in the same color as the door leaf.

It is applied on site following door installation so that it can be adjusted to the actual leaf height.





FIELDS OF APPLICATION FOR THE AUTOMATIC DOOR SWEEP


REVER and UNIVER multipurpose doors

	FM L one-leaved door	L1 active leaf	L2 passive leaf with 30x4mm profile	seals to be used
 1 leaf/active	from 500 to 513 mm	from 500 to 521 mm	from 400 to 431 mm	L 430 mm
	from 514 to 613 mm	from 522 to 621 mm	from 432 to 531 mm	L 530 mm
	from 614 to 713 mm	from 622 to 721 mm	from 532 to 631 mm	L 630 mm
	from 714 to 813 mm	from 722 to 821 mm	from 632 to 731 mm	L 730 mm
	from 814 to 913 mm	from 822 to 921 mm	from 732 to 831 mm	L 830 mm
 passive leaf with 30x4mm profile	from 914 to 1013 mm	from 922 to 1000 mm	from 832 to 931 mm	L 930 mm
	from 1014 to 1113 mm		from 932 to 1000 mm	L 1030 mm
	from 1114 to 1213 mm			L 1130 mm
	from 1214 to 1313 mm			L 1230 mm
	from 1314 to 1350 mm			L 1330 mm

UNIVER fire doors

	FM L one-leaved door	L1 active leaf	L2 passive leaf with 30x4mm profile	seals to be used
 1 leaf/active	from 500 to 513 mm	from 500 to 513 mm	from 400 to 444 mm	L 430 mm
	from 514 to 613 mm	from 514 to 613 mm	from 445 to 544 mm	L 530 mm
	from 614 to 713 mm	from 614 to 713 mm	from 545 to 644 mm	L 630 mm
	from 714 to 813 mm	from 714 to 813 mm	from 645 to 744 mm	L 730 mm
	from 814 to 913 mm	from 814 to 913 mm	from 745 to 844 mm	L 830 mm
 passive leaf with 30x4mm profile	from 914 to 1013 mm	from 914 to 1000 mm	from 845 to 944 mm	L 930 mm
	from 1014 to 1113 mm		from 945 to 1000 mm	L 1030 mm
	from 1114 to 1213 mm			L 1130 mm
	from 1214 to 1313 mm			L 1230 mm
	from 1314 to 1350 mm			L 1330 mm

PROGET fire and multipurpose doors

	FM L one-leaved door	L1 active leaf	L2 passive leaf	seals to be used
 1 leaf/active or passive	from 500 to 520 mm	from 500 to 520 mm	from 350 to 435 mm	L 430 mm
	from 521 to 620 mm	from 521 to 620 mm	from 436 to 535 mm	L 530 mm
	from 621 to 720 mm	from 621 to 720 mm	from 536 to 635 mm	L 630 mm
	from 721 to 820 mm	from 721 to 820 mm	from 636 to 735 mm	L 730 mm
	from 821 to 920 mm	from 821 to 920 mm	from 736 to 835 mm	L 830 mm
	from 921 to 1020 mm	from 921 to 1020 mm	from 836 to 935 mm	L 930 mm
	from 1021 to 1120 mm	from 1021 to 1120 mm	from 936 to 1035 mm	L 1030 mm
	from 1121 to 1220 mm	from 1121 to 1220 mm	from 1036 to 1135 mm	L 1130 mm
	from 1221 to 1320 mm	from 1221 to 1320 mm	from 1136 to 1235 mm	L 1230 mm
	from 1321 to 1340 mm	from 1321 to 1330 mm	from 1236 to 1330 mm	L 1330 mm